


TK01	TK02
------	------

Model		TK01	TK02
Input	Input voltage	AC100-240V, 50/60Hz	
Output	Max power	60W	120W
	Output voltage	DC 3-24V + / - 5%	
	Ripple wave	(mVp-p): <1%	
	Linear modulate	±0.5%max	
	Temperature coefficient	±0.02%/°C	
	Start time	≤3s(240VAC input,io=100%)	
	guard time	≥20ms(240VAC input,io=100%)	
	Output standard	12V3A / 12V5A	12V10A / 24V5A
Protection	Override protection	115%~200%vA,automatic recovery	
	Short-circuit protection	1 channel: automatic recovery	
Insulation	Insulation strength	1500VAC/10mA,1MIN	
	Insulation resistance	≥30MΩ, DC 500V	
Environment	Working temperature	0 °C ~ 40 °C, 10% ~ 90% RH	
	Store temperature	-20 °C ~ 60 °C, 10% ~ 90% RH	
Size	Size	100*130*52mm	160*130*52mm
	Net Weight	300g	491g



TK03	TK04
------	------


Model		TK03	TK04
Input	Input voltage	AC100-240V, 50/60Hz	
Output	Max power	240W	360W
	Output voltage	DC 3-24V + / - 5%	
	Ripple wave	(mVp-p): <1%	
	Linear modulate	±0.5%max	
	Temperature coefficient	±0.02%/°C	
	Start time	≤3s(240VAC input,io=100%)	
	guard time	≥20ms(240VAC input,io=100%)	
	Output standard	12V20A / 24V10A	12V30A / 24V15A
Protection	Override protection	115%~200%vA,automatic recovery	
	Short-circuit protection	1 channel: automatic recovery	
Insulation	Insulation strength	1500VAC/10mA,1MIN	
	Insulation resistance	≥30MΩ, DC 500V	
Environment	Working temperature	0 °C ~ 40 °C, 10% ~ 90% RH	
	Store temperature	-20 °C ~ 60 °C, 10% ~ 90% RH	
Size	Size	200*130*52mm	200*130*52mm
	Net Weight	720g	768g

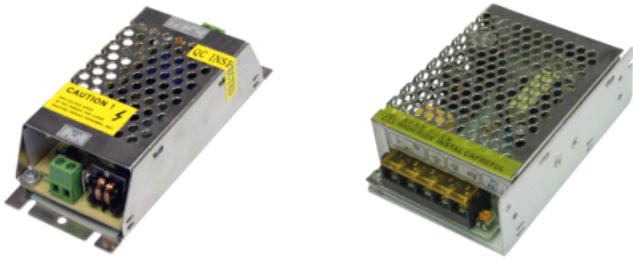

TK11

TK10

Model		TK11	TK10
Input	Input voltage	AC100-240V, 50/60Hz	
Output	Max power	30W	30W
	Output voltage	DC 3-24V + / - 5%	
	Ripple wave	(mVp-p): <1%	
	Linear modulate	±0.5%max	
	Temperature coefficient	±0.02%/°C	
	Start time	≤3s(240VAC input,io=100%)	
	guard time	≥20ms(240VAC input,io=100%)	
	Output standard	12V2A / 24V1A	12V3.2A / 24V1.5A
Protection	Override protection	115%~200%vA,automatic recovery	
	Short-circuit protection	1 channel: automatic recovery	
Insulation	Insulation strength	1500VAC/10mA,1MIN	
	Insulation resistance	≥30MΩ, DC 500V	
Environment	Working temperature	0 °C ~ 40 °C, 10% ~ 90%RH	
	Store temperature	-20 °C ~ 60 °C, 10% ~ 90%RH	
Size	Size	85*59*33mm	115*75*35mm
	Net Weight	133g	

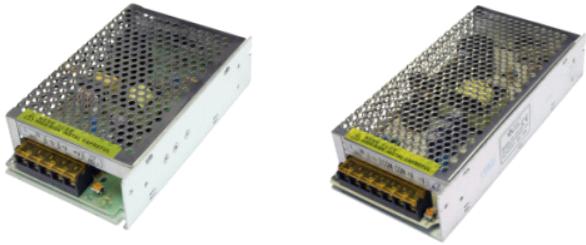

TK09	TK06
------	------

Model		TK09	TK06
Input	Input voltage	AC100-240V, 50/60Hz	
Output	Max power	72W	180W
	Output voltage	DC 3-24V + / - 5%	
	Ripple wave	(mVp-p): <1%	
	Linear modulate	±0.5%max	
	Temperature coefficient	±0.02%/°C	
	Start time	≤3s(240VAC input,io=100%)	
	guard time	≥20ms(240VAC input,io=100%)	
	Output standard	12V5A / 24V2A	12V10A / 12V15A / 24V5A
Protection	Override protection	115%~200%vA,automatic recovery	
	Short-circuit protection	1 channel: automatic recovery	
Insulation	Insulation strength	1500VAC/10mA,1MIN	
	Insulation resistance	≥30MΩ, DC 500V	
Environment	Working temperature	0 °C ~ 40 °C, 10% ~ 90% RH	
	Store temperature	-20 °C ~ 60 °C, 10% ~ 90% RH	
Size	Size	160*100*43mm	200*100*43mm
	Net Weight	365g	545g



TK08

TK07

Model		TK08	TK07
Input	Input voltage	AC100-240V, 50/60Hz	
Output	Max power	240W	360W
	Output voltage	DC 3-24V + / - 5%	
	Ripple wave	(mVp-p): <1%	
	Linear modulate	±0.5%max	
	Temperature coefficient	±0.02%/°C	
	Start time	≤3s(240VAC input,io=100%)	
	guard time	≥20ms(240VAC input,io=100%)	
	Output standard	12V15A / 12V20A / 24V10A	12V30A / 24V15A
Protection	Override protection	115%~200%vA,automatic recovery	
	Short-circuit protection	1 channel: automatic recovery	
Insulation	Insulation strength	1500VAC/10mA,1MIN	
	Insulation resistance	≥30MΩ, DC 500V	
Environment	Working temperature	0°C~40°C,10%~90%RH	
	Store temperature	-20°C~60°C,10%~90%RH	
Size	Size	200*110*50mm	215*114*50mm
	Net Weight	7753g	988g